

HIGH-PRESSURE LIFTING BAGS

1. 7.



High-pressure lifting bags are used for lifting the heaviest loads. High-pressure lifting bags exert maximum force in a concentrated area, making them ideal when lifting rigid structures in tight places. Their unique structure also allows use in load shifting, heavy truck or aircraft recovery and different moving situations.

Extremely durable	Heavy duty	EN 13731 certified	Thin design
-------------------	------------	--------------------	-------------



- 8 BAR
- 8 FLAT
- 10 FLAT
- 10 BAR



Unique anti-slip surface



Reflective corner markings



Clear & distinctive labels



Strong manipulation handles



Cone-shaped protection edges

1. 7. HIGH-PRESSURE LIFTING BAGS 8 bar (116 psi)



EN 13731
certified

Stackable up
to 2 bags


Extra
durable

Thin
design

TECHNICAL DATA

TYPE	PART NUMBER	DIMENSIONS			WEIGHT	WORKING PRESSURE	AIR REQUIREMENT	MAX. LIFTING CAPACITY	MAX. LIFTING HEIGHT
		LENGTH	WIDTH	HEIGHT					
		[cm] / [inch]	[cm] / [inch]	[cm] / [inch]					
SLK 1	77973	15 / 6"	15 / 6"	2.5 / 1"	0.55 / 1.2	8 / 116	5 / 0.2	1.1 / 1.2	8 / 3.1"
SLK 3	77974	22.5 / 9"	22.5 / 9"	2.5 / 1"	1.25 / 3	8 / 116	15 / 0.5	2.7 / 3	13 / 5.1"
SLK 6	77975	30 / 12"	30 / 12"	2.5 / 1"	2 / 4	8 / 116	42 / 1.5	5.5 / 6.1	16 / 6.3"
SLK 10	76734	38 / 15"	38 / 15"	2.5 / 1"	3.5 / 8	8 / 116	86 / 3.0	10.1 / 11.1	21 / 8.3"
SLK 14	76735	45 / 18"	45 / 18"	2.5 / 1"	5 / 11	8 / 116	152 / 5.4	13.5 / 14.9	25 / 9.8"
SLK 21	76736	55 / 22"	55 / 22"	2.5 / 1"	7 / 15	8 / 116	296 / 10.5	21.1 / 23.2	30 / 11.8"
SLK 25	76737	61 / 24"	61 / 24"	2.5 / 1"	9 / 20	8 / 116	416 / 14.7	25.2 / 27.7	34 / 13.4"
SLK 33	76738	69 / 27"	69 / 27"	2.5 / 1"	11 / 24	8 / 116	621 / 21.9	33 / 36.3	38 / 15"
SLK 45	76739	78 / 31"	78 / 31"	2.5 / 1"	14 / 31	8 / 116	921 / 32.5	44.6 / 49.1	42 / 16.5"
SLK 55	76794	87 / 34"	87 / 34"	2.5 / 1"	18 / 40	8 / 116	1305 / 46.1	55 / 60.5	47 / 18.5"
SLK 70	573241	94.5 / 37"	94.5 / 37"	2.5 / 1"	22.5 / 50	8 / 116	1505 / 53.2	70.4 / 77.4	52 / 20.5"

LIFTING HEIGHT [mm] / [inch]

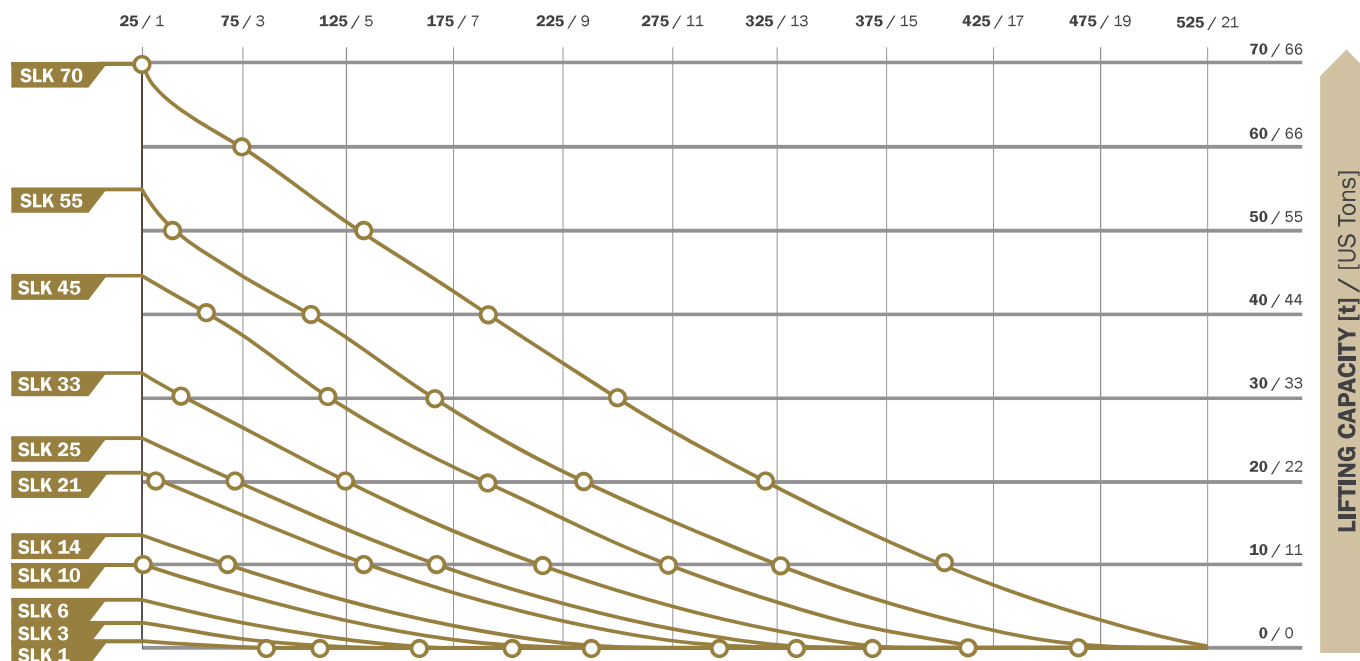



HIGH-PRESSURE LIFTING BAGS 8 bar (116 psi) 1. 7.



8
BAR

EN 13731
certified

Stackable up
to 2 bags


Narrow
design

Easy
manipulation

TECHNICAL DATA

TYPE	PART NUMBER	DIMENSIONS			WEIGHT	WORKING PRESSURE	AIR REQUIREMENT	MAX. LIFTING CAPACITY	MAX. LIFTING HEIGHT
		LENGTH	WIDTH	HEIGHT					
		[cm] / [inch]	[cm] / [inch]	[cm] / [inch]					
SLK-L 9	519833	45 / 18"	30 / 12"	2.5 / 1"	3.3 / 7.3	8 / 116	95 / 3.4	8.9 / 9.8	19 / 7.5"
SLK-L 13	519834	50 / 20"	37.5 / 15"	2.5 / 1"	4.5 / 10	8 / 116	170 / 6.0	13.2 / 14.5	23 / 9.1"
SLK-L 20	519837	75 / 30"	37.5 / 15"	2.5 / 1"	6.5 / 14.3	8 / 116	270 / 9.5	20.2 / 22.2	23 / 9.1"
SLK-L 24	77983	102 / 40"	32 / 13"	2.5 / 1"	7.8 / 17.2	8 / 116	220 / 7.8	24 / 26.4	20 / 7.9"

LIFTING HEIGHT [mm] / [inch]

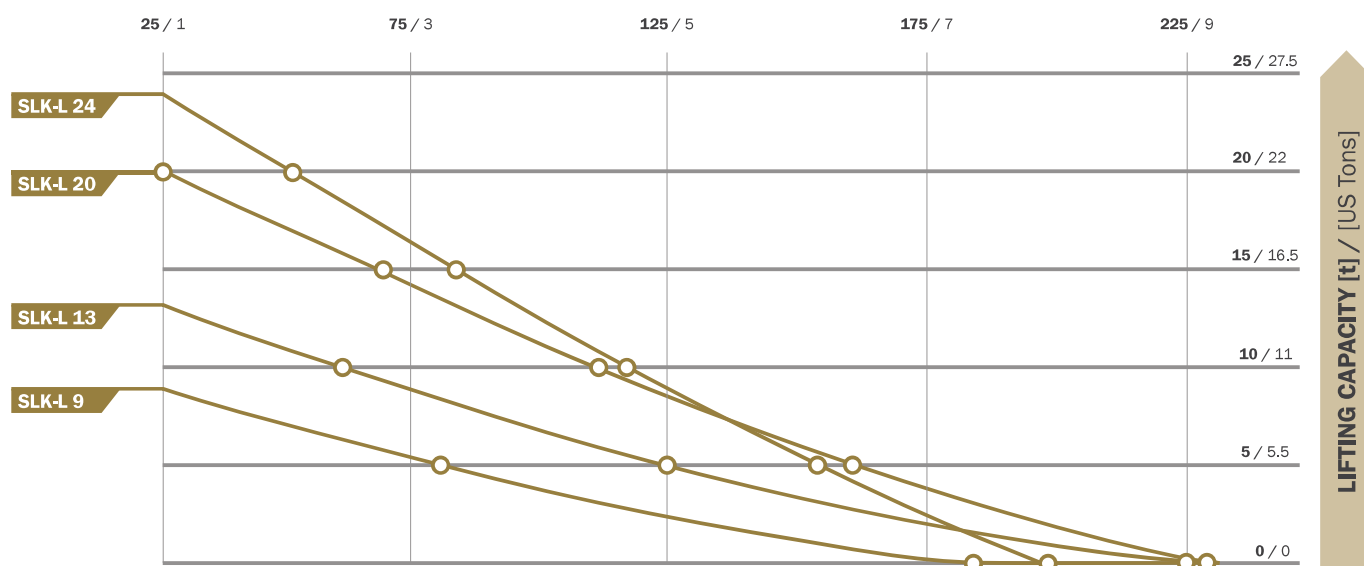

HIGH-PRESSURE LIFTING BAGS

1. 7.

8 bar (116 psi) (FLAT BAGS)



TYPE 25 SAFETY



8
FLAT

EN 13731
certified

Stackable up
to 3 bags

Superb
stability

Flat
surface

TECHNICAL DATA


TYPE	PART NUMBER	DIMENSIONS			WEIGHT	WORKING PRESSURE	AIR REQUIREMENT	MAX. LIFTING CAPACITY	MAX. LIFTING HEIGHT	MAX. LIFTING CAPACITY AT MAX. LIFTING HEIGHT
		LENGTH	WIDTH	HEIGHT						
		[cm] / [inch]	[cm] / [inch]	[cm] / [inch]						
SFB-K 7/17	519883	55 / 22"	55 / 22"	2.5 / 1"	7.3 / 16	8 / 116	224 / 7.9	21.1 / 23.2	17 / 6.7	6.7 / 7.4
SFB-K 10/17	519884	61 / 24"	61 / 24"	2.5 / 1"	9.2 / 20	8 / 116	350 / 12.4	25.2 / 27.7	17 / 6.7	9.5 / 10.5
SFB-K 20/17	519885	78 / 31"	78 / 31"	2.5 / 1"	14.5 / 32	8 / 116	520 / 18.4	44.6 / 49.1	17 / 6.7	20.2 / 22.2
SFB-K 33/17	519886	91.5 / 36"	91.5 / 36"	2.5 / 1"	20.6 / 45	8 / 116	810 / 28.6	64 / 70.4	17 / 6.7	33.3 / 36.6

ACCESSORIES


(SUITABLE FOR FLAT BAGS ONLY)



**TRIPLE DEADMAN
CONTROLLER METAL BOX**
8 bar (116 psi)
4.0 kg (8.8 lbs)
544124




**SET OF TRIPLE FLAT
BAG CONNECTORS,
ORANGE**
(4 PCS PER SET)
0.6 kg (1.3 lbs)
530545



**SET OF DUAL FLAT BAG
CONNECTORS, YELLOW**
(4 PCS PER SET)
0.4 kg (0.88 lbs)
529480

LIFTING HEIGHT [mm] / [inch]

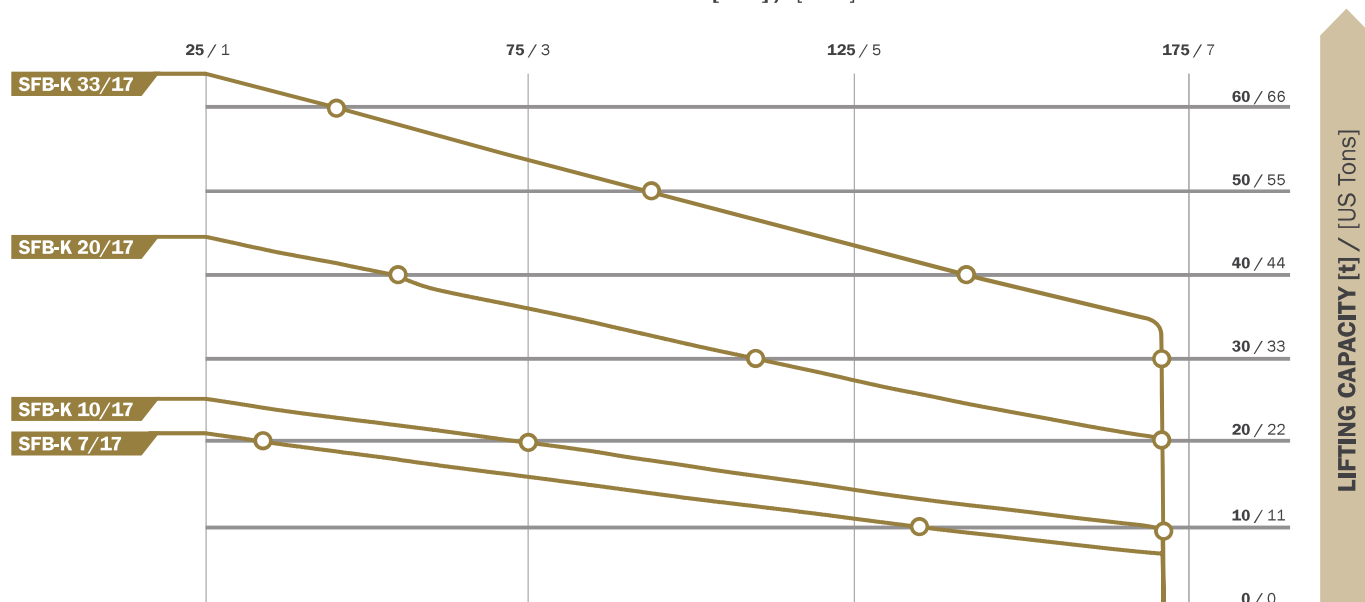

ACCESSORIES FOR HIGH-PRESSURE LIFTING BAGS 8 bar (116 psi)

1. 7.

INFLATION HOSES




TYPE	5 m (16')	10 m (33')
	0.8 kg (1.8 lbs)	1.4 kg (3 lbs)
RED	516191	516193
YELLOW	517967	517968
BLUE	516192	516194
GREY	529317	529318

8
BAR

CONTROLLERS



**SINGLE FITTING
CONTROLLER**
8 bar (116 psi)
0.9 kg (2 lbs)
76681



**HAND-HELD DOUBLE
DEADMAN CONTROLLER**
8 bar (116 psi)
1.6 kg (3.5 lbs)
519820



**DOUBLE FITTING
CONTROLLER**
8 bar (116 psi)
2.0 kg (4.4 lbs)
76682




**DOUBLE DEADMAN
CONTROLLER
PLASTIC BOX**
8 bar (116 psi)
2.9 kg (6.4 lbs)
528126



**HAND-HELD SINGLE
DEADMAN CONTROLLER**
8 bar (116 psi)
1.2 kg (2.6 lbs)
519819



**DOUBLE DEADMAN
CONTROLLER
METAL BOX**
8 bar (116 psi)
3.0 kg (6.6 lbs)
528132



**DOUBLE DEADMAN
CONTROLLER
LED LIGHTS,
PLASTIC BOX**
8 bar (116 psi)
3.0 kg (6.6 lbs)
576803




**DOUBLE CONTROLLER
CASE BOX**
8 bar (116 psi)
3.0 kg (6.6 lbs)
579558

8
FLAT

OTHER ACCESSORIES



**HOSE WITH
SHUT-OFF VALVE**
0.5 m (1.6')
0.3 kg (0.66 lbs)
525278



**HOSE WITH SHUT-OFF +
SAFETY VALVE**
8 bar (116 psi),
10 m (33')
2.0 kg (4.4 lbs)
544111



SHUT-OFF + SAFETY VALVE
8 bar (116 psi)
0.4 kg (0.88 lbs)
519051



INFLATION DISTRIBUTOR
YELLOW, 1 m (3')
0.7 kg (1.5 lbs)
522999



FOOT PUMP 8 bar (116 psi)
3 kg (6.6 lbs)
538320



SINGLE STAGE REGULATOR
8 bar (116 psi)
0.4 kg (0.88 lbs)
72128-CGA-8 bar



PRESSURE REDUCER
8 bar (116 psi)
200/300 bar (2900/4350 psi)
1.7 kg (3.7 lbs)
DIN - 523835
CGA - 595820

MINI LIFTING SET



HIGH-PRESSURE LIFTING BAGS

1. 7.

10 bar (145 psi)



TYPE 25-10 SAFETY

10
BAR



EN 13731
certified

Increased
lifting capacity


Compatible with
8 bar (116 psi) bags

Heavy
duty

TECHNICAL DATA

TYPE	PART NUMBER	DIMENSIONS			WEIGHT	WORKING PRESSURE	AIR REQUIREMENT	MAX. LIFTING CAPACITY	MAX. LIFTING HEIGHT
		LENGTH	WIDTH	HEIGHT					
		[cm] / [inch]	[cm] / [inch]	[cm] / [inch]					
SLK-H 1	291240	15 / 6"	15 / 6"	2.5 / 1"	0.55 / 1.2	10 / 145	7 / 0.3	1.2 / 1.3	8 / 3.1"
SLK-H 4	291241	22.5 / 9"	22.5 / 9"	2.5 / 1"	1.25 / 3	10 / 145	19 / 0.7	3.3 / 3.6	13 / 5.1"
SLK-H 7	291242	30 / 12"	30 / 12"	2.5 / 1"	2 / 4	10 / 145	52 / 1.9	6.8 / 7.5	16 / 6.3"
SLK-H 12	291243	38 / 15"	38 / 15"	2.5 / 1"	3.5 / 8	10 / 145	106 / 3.8	12.1 / 13.3	21 / 8.3"
SLK-H 17	291244	45 / 18"	45 / 18"	2.5 / 1"	5 / 11	10 / 145	186 / 6.6	16.6 / 18.3	25 / 9.3"
SLK-H 26	291245	55 / 22"	55 / 22"	2.5 / 1"	7 / 15	10 / 145	362 / 12.8	26.3 / 28.9	30 / 11.8"
SLK-H 32	291246	61 / 24"	61 / 24"	2.5 / 1"	9 / 20	10 / 145	508 / 18.0	31.8 / 35	34 / 13.4"
SLK-H 41	291247	69 / 27"	69 / 27"	2.5 / 1"	11 / 24	10 / 145	759 / 26.8	41.3 / 45.4	38 / 15"
SLK-H 56	291248	78 / 31"	78 / 31"	2.5 / 1"	14.1 / 31	10 / 145	1122 / 39.7	55.8 / 61.4	42 / 16.5"
SLK-H 69	291249	87 / 34"	87 / 34"	2.5 / 1"	18.2 / 40	10 / 145	1595 / 56.4	68.7 / 75.6	47 / 18.5"
SLK-H 88	291250	94.5 / 37"	94.5 / 37"	2.5 / 1"	22.7 / 50	10 / 145	1650 / 58.3	88 / 96.8	52 / 20.5"

LIFTING HEIGHT [mm] / [inch]

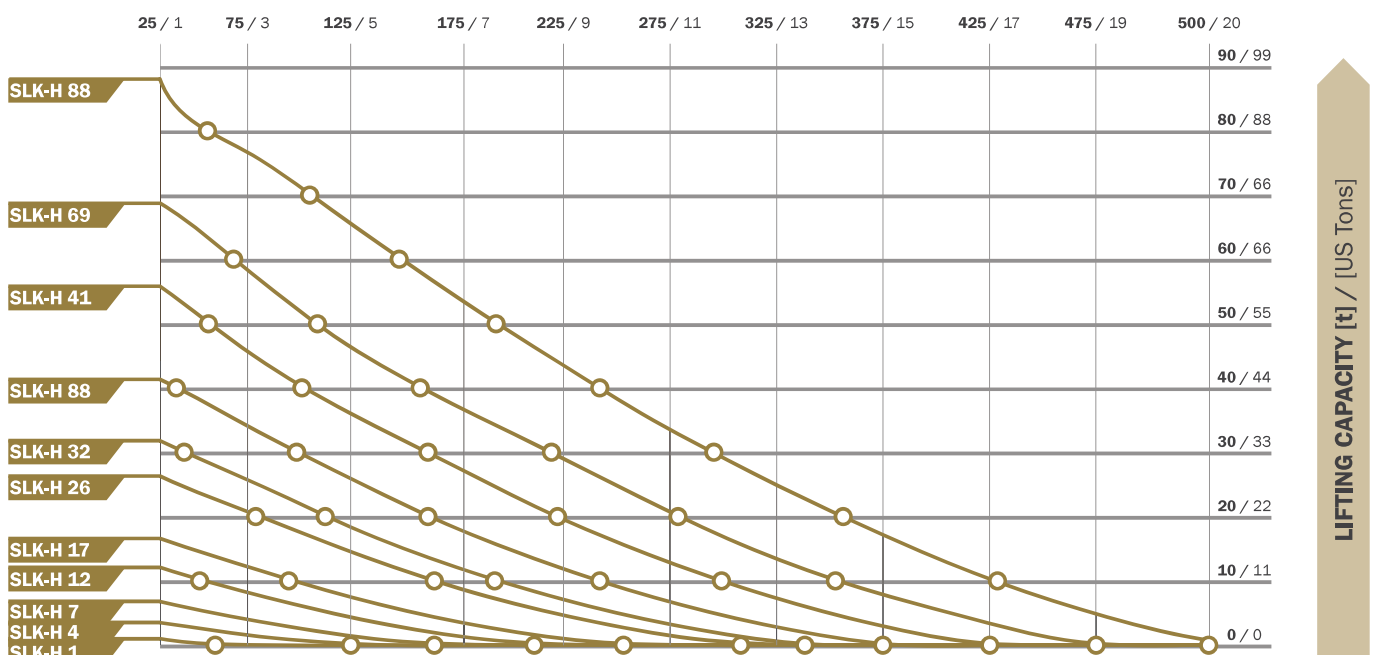



TYPE 25-10 SAFETY

HIGH-PRESSURE LIFTING BAGS 10 bar (145 psi) (FLAT BAGS)

1. 7.



10
FLAT

EN 13731
certified

Increased
lifting capacity

Compatible with
8 bar (116 psi) accessories

Heavy
duty

TECHNICAL DATA

TYPE	PART NUMBER	DIMENSIONS			WEIGHT	WORKING PRESSURE	AIR REQUIREMENT	MAX. LIFTING CAPACITY	MAX. LIFTING HEIGHT	MAX. LIFTING CAPACITY AT MAX. LIFTING HEIGHT
		LENGTH	WIDTH	HEIGHT						
		[cm] / [inch]	[cm] / [inch]	[cm] / [inch]						
SFB-H 8/17	291294	55 / 22"	55 / 22"	2.5 / 1"	7.4 / 16	10 / 145	280 / 9.9	26.4 / 29	17 / 6.7"	8.1 / 8.9
SFB-H 12/17	291295	61 / 24"	61 / 24"	2.5 / 1"	9.2 / 20	10 / 145	437.5 / 15.5	31.5 / 34.7	17 / 6.7"	11.9 / 13.1
SFB-H 25/17	291296	78 / 30"	78 / 30"	2.5 / 1"	14.5 / 32	10 / 145	650 / 23	55.8 / 61.3	17 / 6.7"	25.3 / 27.8
SFB-H 42/17	291297	91.5 / 36"	91.5 / 36"	2.5 / 1"	20.5 / 45	10 / 145	1012.5 / 35.8	80 / 88	17 / 6.7"	41.6 / 45.8

ACCESSORIES


(SUITABLE FOR FLAT BAGS ONLY)



**TRIPLE DEADMAN
CONTROLLER METAL BOX**
10 bar (145 psi) -
4.0 kg (8.8 lbs)
291298




**SET OF TRIPLE FLAT
BAG CONNECTORS,
ORANGE**
(4 PCS PER SET)
0.6 kg (1.3 lbs)
530545



**SET OF DUAL FLAT BAG
CONNECTORS, YELLOW**
(4 PCS PER SET)
0.4 kg (0.88 lbs)
529480

LIFTING HEIGHT [mm] / [inch]

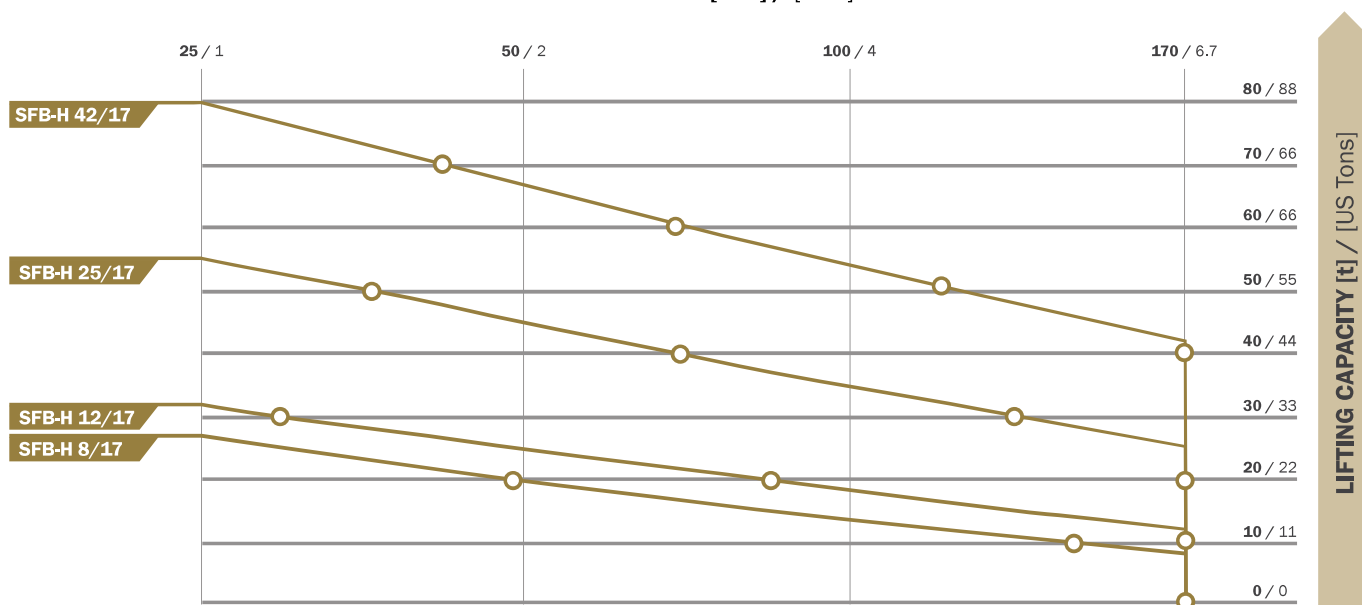

ACCESSORIES FOR HIGH-PRESSURE LIFTING BAGS 10 bar (145 psi)

1. 7.

10
BAR

10
FLAT

INFLATION HOSES




TYPE	5 m (16')	10 m (33')
	0.8 kg (1.8 lbs)	1.4 kg (3 lbs)
RED	291261	291265
YELLOW	291260	291264
BLUE	291262	291266
GREY	291263	291267

CONTROLLERS



**SINGLE FITTING
CONTROLLER**
10 bar (145 psi)
0.9 kg (0.2 lbs)
291258



**HAND-HELD DOUBLE
DEADMAN CONTROLLER**
10 bar (145 psi)
1.6 kg (3.6 lbs)
291257



**DOUBLE CONTROLLER
CASE BOX**
10 bar (145 psi)
3.0 kg (6.6 lbs)
579559



**DOUBLE FITTING
CONTROLLER**
10 bar (145 psi)
2.0 kg (4.4 lbs)
291259



**DOUBLE DEADMAN
CONTROLLER
PLASTIC BOX**
10 bar (145 psi)
2.9 kg (6.4 lbs)
291255



**DOUBLE DEADMAN
CONTROLLER, LED
LIGHTS, PLASTIC BOX**
10 bar (145 psi)
3.0 kg (6.6 lbs)
291286



**HAND-HELD
SINGLE DEADMAN
CONTROLLER**
1.2 kg (2.6 lbs)
10 bar (145 psi)
291256



**DOUBLE DEADMAN
CONTROLLER METAL
BOX**
10 bar (145 psi)
3.0 kg (6.6 lbs)
291254



OTHER ACCESSORIES



**SINGLE STAGE
REGULATOR CGA,**
10 bar (145 psi)
0.4 kg (0.88 lbs)
72128-CGA-10 bar



SHUT-OFF + SAFETY VALVE
10 bar (145 psi)
0.3 kg (0.66 lbs)
291282



FOOT PUMP -
10 bar (145 psi)
3.0 kg (6.6 lbs)
576565



ADAPTER
8 bar (116 psi)
10 bar (145 psi)
0.2 kg (0.44 lbs)
291284



**INFLATION DISTRIBUTOR
YELLOW**
10 bar (145 psi)
1 m (3')
0.7 kg (1.5 lbs)
589334



PRESSURE REDUCER
10 bar (145 psi)
300 bar (4350 psi)
1.7 kg (3.7 lbs)
DIN - 557311
CGA - 596586



**HOSE WITH SHUT-OFF
+ SAFETY VALVE**
10 bar (145 psi)
10 m (33')
1.4 kg (3 lbs)
291290



**HOSE WITH
SHUT-OFF VALVE**
10 bar (145 psi)
0.5 m (1.5')
0.3 kg (0.66 lbs)
589333

Simple
switch to
8 bar (116 psi)
accessories

Inflation accessories have been designed for precision control, high reliability and long life. They are used with all of our lifting bags – from the source of air to controllers.



COMPRESSED AIR CYLINDER
300 bar (4350 psi),
6l (366 cu.in.)
9.0 kg (20 lbs)
528746



CARRY-ON VALISE
FOR COMPRESSED AIR CYLINDER
0.1 kg (2.2 lbs)
519811



UNIVERSAL CONNECTOR KIT
0.2 kg (0.44 lbs)
519809



TRUCK TYRE VALVE CONNECTION
0.1 kg (2.2 lbs)
519806



TRUCK TYRE VALVE
0.05 kg (0.11 lbs)
519805



COMPRESSED AIR MAINS
0.05 kg (0.11 lbs)
519808




TRUCK TYRE INFLATOR ADAPTER
0.05 kg (0.11 lbs)
519807



DUAL CONNECTOR FOR COMPRESSED AIR CYLINDERS
1.0 kg (2.2 lbs)
529383




TRIPLE CONNECTOR FOR COMPRESSED AIR CYLINDERS
1.2 kg (2.6 lbs)
529384



TRUCK COMPRESSED AIR CONNECTION
0.4 kg (0.88 lbs)
529005



TRUCK COMPRESSED AIR CONNECTION-BLIND COUPLING
0.5 kg (1.1 lbs)
529006



ADAPTER FOR CONSTRUCTION SITE COMPRESSOR
0.2 kg (0.44 lbs)
529704



SAFETY CARRIER RACK-TWO CYLINDER
6l (366 cu.in.)
MODUL-TROLLEY SYSTEM
3.0 kg (6.6 lbs)
542868



SAFETY CARRIER RACK-FOUR CYLINDER
6l (366 cu.in.)
MODUL-TROLLEY SYSTEM
5.0 kg (11 lbs)
542872



LOADING PLATES
LOAD PLATE # 350 556308
3.5 kg (7.7 lbs)
LOAD PLATE # 420 556309
5.0 kg (11 lbs)
LOAD PLATE # 520 556310
7.5 kg (16.5 lbs)
LOAD PLATE # 670 556311
13.0 kg (29 lbs)

All above accessories are suitable for EU market, US versions available upon request!